



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

VLT® DriveMotor FCM 300

The VLT® DriveMotor FCM 300 series is an integrated drive-motor solution which combines a VLT® frequency converter and a high standard quality motor in a single product.



The frequency converter is attached in place of the motor terminal box and it is no higher than the standard terminal box nor wider or longer than the motor.

Incorporated to a high standard quality motor, the VLT® DriveMotor FCM 300 is also available in a multitude of variants, individualised to meet customer requirements.

On the motor
The VLT® electronic motor control together with the motor totally eliminates motor cables and thereby minimises EMC problems. Heat from the drive is dissipated together with the motor heat.

Power range

0.55 – 7.5 kW, 3 x 380 – 480 V

Enclosure

IP 55 (standard)

IP 65/IP 66 (optional)

Motor type

2-pole

4-pole

Mounting versions

B03 foot

B05 flange

B35 foot + flange

B14 face

B34 foot + face

IE2


motors for high efficiency combined with a high-performance, energy saving VLT®.

Feature	Benefit
Reliable	Maximum uptime
Robust enclosure	Withstands harsh environments
No power cable length limitation	Increased flexibility
Thermal protection	Total motor-inverter protection
Straightforward EMC compliance	No problem with electromagnetic interferences
User-friendly	Saves commissioning and operating cost
Motor and drive perfectly matched to each other	Saves commissioning time
No panel space required – the DriveMotor is placed on the machine	Saves space
Flexible mounting – foot/flange/face/foot-flange/foot-face	Meets customer requirements
Retrofit without mechanical changes	Easy service
Set-up and controlled through a remote control panel or fieldbus communication and dedicated MCT 10 set-up software	Easy commissioning



Control panel

A Local Control Panel is used for operating, setup and diagnostics. The LCP can be handheld or mounted in a panel front (IP 65).

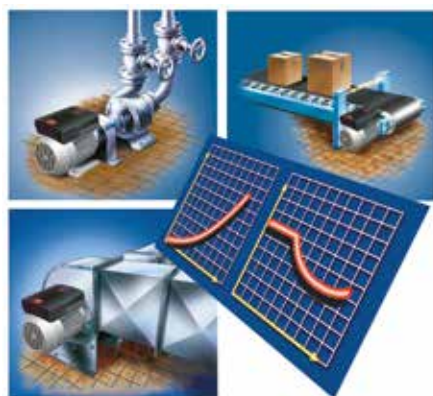

Sleep Mode

In Sleep Mode the motor will stop in a no load situation. When the load returns, the frequency converter will restart the motor.

Also available:

Forced ventilation

For constant operation at low speed without torque reduction.

Motor drain holes

For applications where formation of condensate water might occur.

Sensorless Pump Control – OEM version

Offers precise pressure (head) control without using a pressure transmitter.

Specifications

Mains supply (L1, L2, L3)

Supply voltage	3 x 380/400/415/440/460/480V ± 10%
Supply frequency	50/60 Hz
Power factor (cos φ)	Max. 0.9/1.0 at rated load
Max. imbalance of supply voltage	± 2% of rated supply voltage
Switching on supply input	Once every 2 minutes

Control Characteristics (frequency converter)

Frequency range	0 – 132 Hz
Overload torque	160% for 60 sec.
Resolution on output frequency	0.1%
System response time	30 msec. ± 10 msec.
Speed accuracy	± 15 RPM (open loop, CT mode, 4-pole motor 150 – 1500 RPM)

Digital inputs

Programmable digital inputs	4
Voltage level	0 – 24 V DC (PNP positive logic)

Analogue inputs

Analogue inputs	2 (1 voltage, 1 current)
Voltage/current level	0 – 10 V DC / 0/4 – 20 mA (scaleable)

Pulse input

Programmable pulse inputs	1 (24 V DC)
Max. frequency	70 kHz (push-pull) / 8 kHz (open collector)

Analogue/digital output

Programmable analogue/digital outputs	1
Current/voltage range	0/4 – 20 mA / 24 V DC

Relay output

Programmable relay outputs	1
Max. terminal load	250 V AC, 2 A, 500 VA

Fieldbus communication

FC Protocol, Modbus RTU	Built-in
Profibus DP	Optional (integrated)

Externals

Vibration test	1.0 g (IEC 60068)
Max. relative humidity	95% (IEC 60068-2-3)
Ambient temperature	Max. 40°C (24 hour average max. 35°C)
Min. ambient temperature in full operation	0°C
Min. ambient temperature at reduced performance	-10°C

Technical Data

FCM	305	307	311	315	322	330	340	355	375
Motor output [HP]	0.75	1.0	1.5	2.0	3.0	4.0	5.0	7.5	10.0
[kW]	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5
Motor torque 2-pole [Nm] ¹⁾	1.8	2.4	3.5	4.8	7.0	9.5	12.6	17.5	24.0
4-pole [Nm] ²⁾	3.5	4.8	7.0	9.6	14.0	19.1	25.4	35.0	48.0
Frame size [mm]	80	80	90	90	100	100	112	132	132
Input current [A] 380 V 2-pole	1.5	1.8	2.3	3.4	4.5	5.0	8.0	12.0	15.0
4-pole	1.4	1.7	2.5	3.3	4.7	6.4	8.0	11.0	15.5
Input current [A] 480 V 2-pole	1.2	1.4	1.8	2.7	3.6	4.0	6.3	9.5	11.9
4-pole	1.1	1.3	2.0	2.6	3.7	5.1	6.3	8.7	12.3

¹⁾ at 400 V, 3000 RPM

²⁾ at 400 V, 1500 RPM

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
VLT® DriveMotor FCM 300	134L8923		Buy on EAN
VLT® DriveMotor FCM 300	176H0330		Buy on EAN
VLT® DriveMotor FCM 300	177H3062		Buy on EAN
VLT® DriveMotor FCM 300	177H2443		Buy on EAN
VLT® DriveMotor FCM 300	177H3272		Buy on EAN
VLT® DriveMotor FCM 300	177H0181		Buy on EAN
VLT® DriveMotor FCM 300	177H0121		Buy on EAN
VLT® DriveMotor FCM 300	177H0561		Buy on EAN
VLT® DriveMotor FCM 300	177H0410		Buy on EAN
VLT® DriveMotor FCM 300	134L7442		Buy on EAN
VLT® DriveMotor FCM 300	177H0171		Buy on EAN
VLT® DriveMotor FCM 300	134F3823		Buy on EAN
VLT® DriveMotor FCM 300	176H0180		Buy on EAN
VLT® DriveMotor FCM 300	134G2816		Buy on EAN
VLT® DriveMotor FCM 300	177H0221		Buy on EAN

VLT® DriveMotor FCM 300	177H0220	Buy on EAN
VLT® DriveMotor FCM 300	177H0161	Buy on EAN
VLT® DriveMotor FCM 300	177H0162	Buy on EAN
VLT® DriveMotor FCM 300	177H0164	Buy on EAN
VLT® DriveMotor FCM 300	177H3061	Buy on EAN
VLT® DriveMotor FCM 300	176H0121	Buy on EAN
VLT® DriveMotor FCM 300	177H1151	Buy on EAN
VLT® DriveMotor FCM 300	134U1336	Buy on EAN
VLT® DriveMotor FCM 300	177H0201	Buy on EAN
VLT® DriveMotor FCM 300	177H0142	Buy on EAN
VLT® DriveMotor FCM 300	177H0141	Buy on EAN
VLT® DriveMotor FCM 300	177H3161	Buy on EAN
VLT® DriveMotor FCM 300	177H0454	Buy on EAN
VLT® DriveMotor FCM 300	177H0132	Buy on EAN
VLT® DriveMotor FCM 300	176H0140	Buy on EAN
VLT® DriveMotor FCM 300	134G0747	Buy on EAN
VLT® DriveMotor FCM 300	177H0261	Buy on EAN
VLT® DriveMotor FCM 300	177H0260	Buy on EAN
VLT® DriveMotor FCM 300	177H0120	Buy on EAN
VLT® DriveMotor FCM 300	177H0122	Buy on EAN
VLT® DriveMotor FCM 300	176H0370	Buy on EAN
VLT® DriveMotor FCM 300	177H0112	Buy on EAN
VLT® DriveMotor FCM 300	134F4964	Buy on EAN
VLT® DriveMotor FCM 300	176H0161	Buy on EAN
VLT® DriveMotor FCM 300	176H0160	Buy on EAN
VLT® DriveMotor FCM 300	177H2512	Buy on EAN

VLT® DriveMotor FCM 300	134F7093	Buy on EAN
VLT® DriveMotor FCM 300	177H0241	Buy on EAN
VLT® DriveMotor FCM 300	177H0240	Buy on EAN
VLT® DriveMotor FCM 300	177H0350	Buy on EAN
VLT® DriveMotor FCM 300	177H0102	Buy on EAN
VLT® DriveMotor FCM 300	177H1456	Buy on EAN
VLT® DriveMotor FCM 300	177H3293	Buy on EAN
VLT® DriveMotor FCM 300	177H0191	Buy on EAN
VLT® DriveMotor FCM 300	177H3007	Buy on EAN
VLT® DriveMotor FCM 300	177H0391	Buy on EAN
VLT® DriveMotor FCM 300	177H0521	Buy on EAN
VLT® DriveMotor FCM 300	134G3662	Buy on EAN
VLT® DriveMotor FCM 300	177H0152	Buy on EAN